

Panther Batterien

Batteriedatenblatt



MG 53030


ETN: GEL 530 0 30 030
DIN: 53030

Specifications

Model NO .	MG53030 DIN:53030 ETN:GEL530036030	
Same Dimensions As YUASA Model	YTX30L-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	28 AH	
Dimension	Length	168 mm (6.61 inches)
	Width	127 mm (5.00 inches)
	Height	177 mm (6.97 inches)
	Total Height	177 mm (6.97 inches)
Approx. Wight	Approx. 8.54kg (18.8Lbs)	
Charge Current (A)	2.8 A	



Dimensions

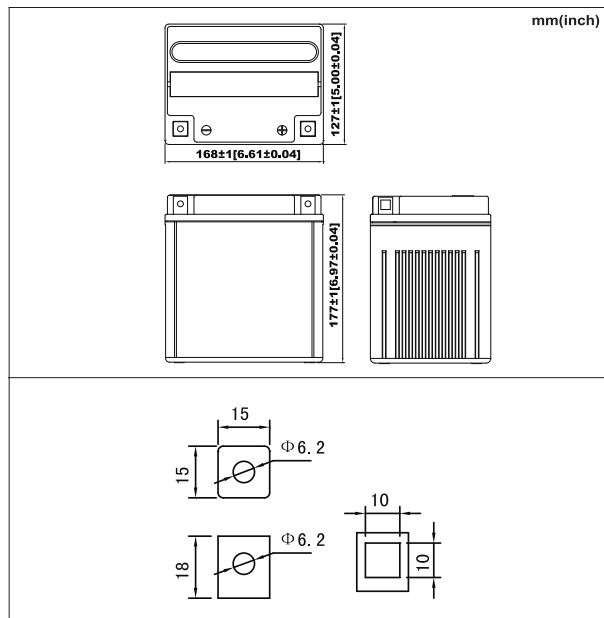

Characteristics

Capacity 25°C(77°F)	10hours rate (2.8 A to 10.5V)	28 Ah
	5hours rate (5.6A to 10.2V)	23.8 Ah
	1C (28.0A to 9.6V)	12.6 Ah
	3C (84.0A to 9.6V)	10.0 Ah
Cold Cranking Amperes(-18°C SAE Standard)	260 A	
Cold Cranking Amperes(-18°C EN Standard)	390 A	
Internal Resistance (at 1KHz)	Approx.7.5mΩ	
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	pp	

