accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

CTX16-BS

ETN: 514 0 45 022

DIN: 51445

Specifications

Model NO .		CTX16BS DIN:51445 ETN:514045022
Same Dimensions As YUASA Model		YTX16-BS
Nominal Voltage		12V
Rated Capacity (10 hours rate)		14 AH
Dimension	Length	150 mm (5.91 inches)
	Width	87 mm (3.43 inches)
	Height	159 mm (6.26 inches)
	Total Height	159 mm (6.26 inches)
Approx. Weight W/O . ACID		3.95 kg (8.71 Lbs)
Approx. ACID Per Battery		0.77 L
Charge Current (A)		1.4 A

Characteristics

Capacity 25°C(77°F)	10hours rate	(1.4 A to 10.5V)	14 Ah
	5hours rate	(2.8 A to 10.2V)	11.9 Ah
	1C	(14 A to 9.6V)	6.3 Ah
	3C	(42 A to 9.6V)	5.0 Ah
Cold Cranking Amperes(-18°C SAE Standard)			200 A
Cold Cranking Amperes(-18°C EN Standard)			300 A
Internal Resistance (at 1KHz)			Approx.7.0mΩ
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)	
	Discharge	-15°C (5°F) to 50°C (122°F)	
	Storage	-15°C (5°F) to 50°C (122°F)	
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles		
	80% depth of discharge 225 cycles		
	50% depth of discharge 500 cycles		
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%	
	3 month	90%	
	6 month	80%	
Standby Use	3~5 years		
Case Material	PP		
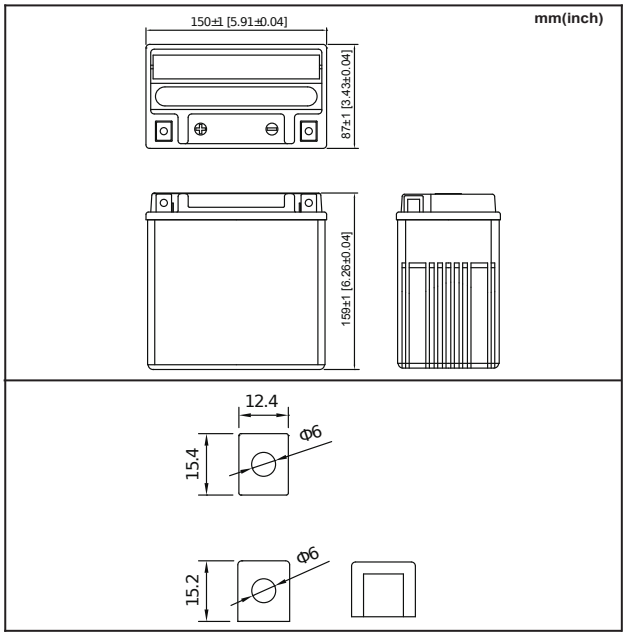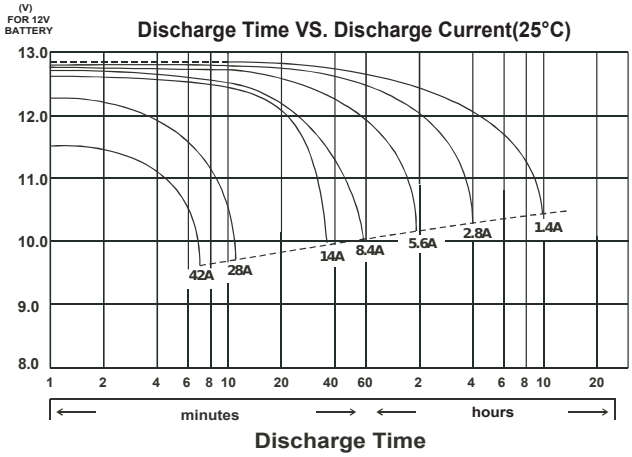
Dimensions