

Panther Batterien

Batteriedatenblatt



CB14LA-2


ETN: GEL 514 0 11 014
DIN: 51411

Specifications

Model NO.	CB14LA-2 DIN:51411 ETN:GEL514011014	
Same Dimensions As YUASA Model	YB14L-A2	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	13 AH	
Dimension	Length	134 mm (5.28 inches)
	Width	88 mm (3.46 inches)
	Height	166 mm (6.54 inches)
	Total Height	166mm (6.54 inches)
Approx. Weight	Approx. 3.61kg (8.0Lbs)	
Charge Current (A)	1.3A	



Dimensions

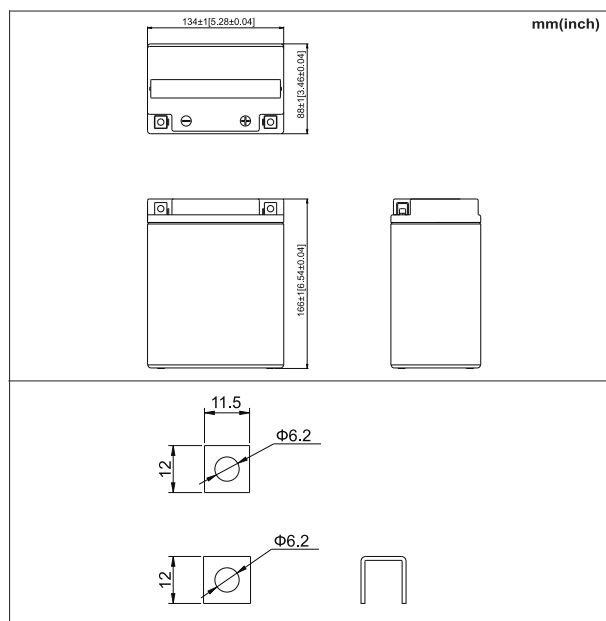

Characteristics

Capacity 25°C(77°F)	10hours rate (1.4 A to 10.5V)	13.0Ah
	5hours rate (2.8 A to 10.2V)	11.1Ah
	1C (14 A to 9.6V)	5.9 Ah
	3C (42 A to 9.6V)	4.7 Ah
Cold Cranking Amperes(-18°C SAE Standard)	150 A	
Cold Cranking Amperes(-18°C EN Standard)	240 A	
Internal Resistance (at 1KHz)	Approx.7.5mΩ	
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	ABS	

(V) FOR 12V BATTERY
Discharge Time VS. Discharge Current(25 °C)

