accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

CTX9-BS

ETN: 508 0 12 008
DIN: 50812

Specifications

Model NO .		CTX9-BS DIN:50812 ETN:508012008
Same Dimensions As YUASA Model		YTX9-BS
Nominal Voltage		12V
Rated Capacity (10 hours rate)		8 AH
Dimension	Length	150 mm (5.90 inches)
	Width	87 mm (3.43 inches)
	Height	105 mm (4.13 inches)
	Total Height	105 mm (4.13 inches)
Approx. Weight		Approx.3.0kg (6.6Lbs)
Charge Current (A)		0.8 A

Characteristics

Capacity 25℃(77℉)	10hours rate (0.8 A to 10.5V)	8.0Ah
	5hours rate (1.6 A to 10.2V)	6.8Ah
	1C (8.0 A to 9.6V)	3.6Ah
	3C (24.0 A to 9.6V)	2.9Ah
Cold Cranking Amperes(-18℃ SAE Standard)		90 A
Cold Cranking Amperes(-18℃ EN Standard)		135 A
Internal Resistance (at 1KHz)		Appox.7.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)
	Discharge	-15℃ (5℉) to 50℃ (122℉)
	Storage	-15℃ (5℉) to 40℃ (104℉)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20℃ (68℉)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	PP	
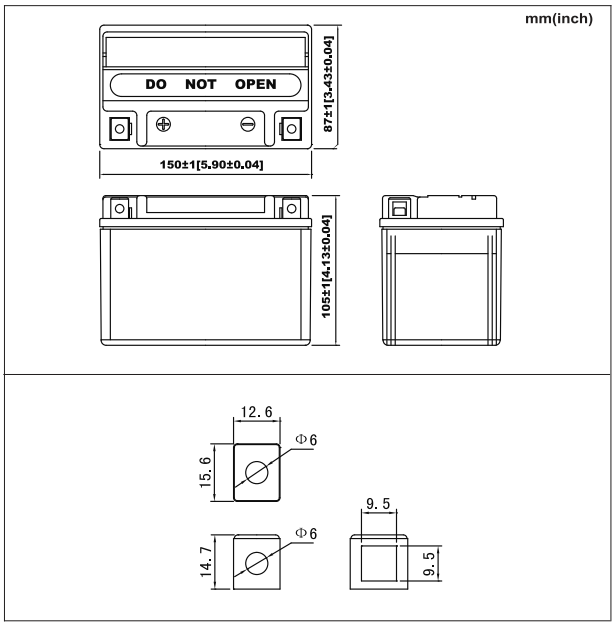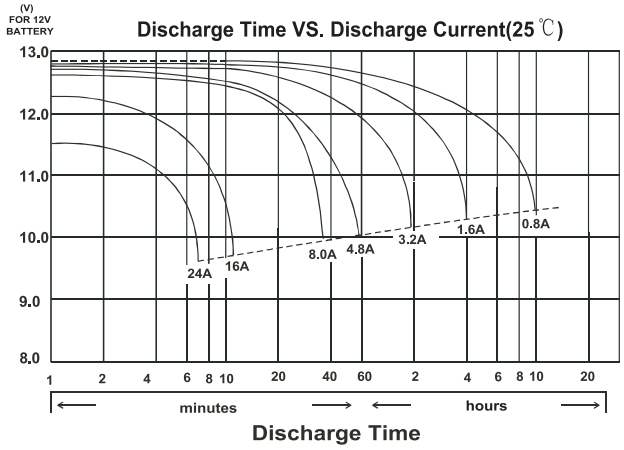
Dimensions