

Panther Batterien

Batteriedatenblatt



CTX20L-BS

ETN: GEL 520 0 14 024


DIN: 52014

Specifications

Model NO.	CTX20L-BS DIN:52014 ETN:GEL520014024	
Same Dimensions As YUASA Model	YTX20L-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	20 AH	
Dimension	Length	175 mm (6.89 inches)
	Width	87 mm (3.43 inches)
	Height	155 mm (6.10 inches)
	Total Height	155 mm (6.10 inches)
Approx. Wight	Approx. 6.58kg (14.51Lbs)	
Charge Current (A)	2.0 A	



Dimensions

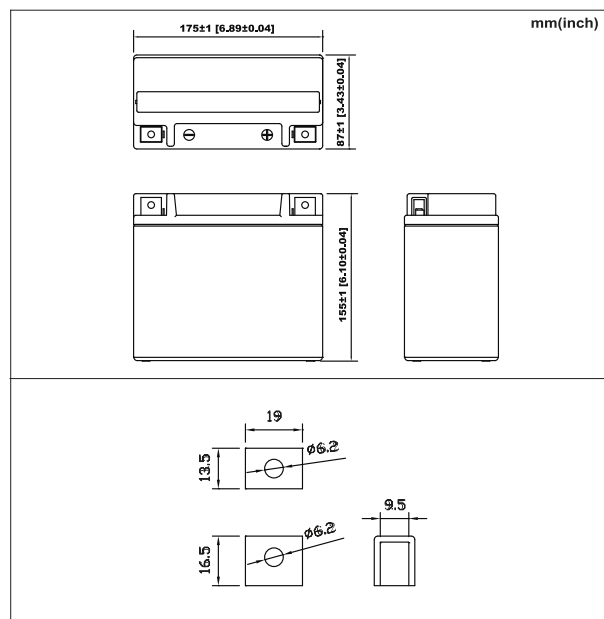

Characteristics

Capacity 25°C (77°F)	10hours rate (2.0 A to 10.5V)	20Ah
	5hours rate (4.0 A to 10.2V)	15.8 Ah
	1C (20.0A to 9.6V)	8.5 Ah
	3C (60.0A to 9.6V)	6.8 Ah
Cold Cranking Amperes(-18°C SAE Standard)		200 A
Cold Cranking Amperes(-18°C EN Standard)		300 A
Internal Resistance (at 1KHz)		Approx. 7.5mΩ
Operating Temperature Range	Charge 0°C (32°F) to 40°C (104°F)	
	Discharge -15°C (5°F) to 50°C (122°F)	
	Storage -15°C (5°F) to 40°C (104°F)	
Life Expectancy (Cycle Use)	100% depth of discharge	200 cycles
	80% depth of discharge	225 cycles
	50% depth of discharge	500 cycles
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	ABS	

(V) FOR 12V BATTERY
Discharge Time VS. Discharge Current(25 °C)

