accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

YTR4A-BS

ETN: 504 0 15 002
DIN: 50415

Specifications

Model NO .		YTR4A-BS DIN:50415 ETN:504015002
Same Dimensions As YUASA Model		YTR4A-BS
Nominal Voltage		12V
Rated Capacity (10 hours rate)		2.3AH
Dimension	Length	113mm (4.45inches)
	Width	48mm (1.89inches)
	Height	85mm (3.35nches)
	Total Height	85mm (3.35inches)
Approx. Weight W/O . ACID		0.83kg (1.83Lbs)
Approx. ACID Per Battery		0.13 L
Charge Current (A)		0.23A

Characteristics

Capacity 25℃(77℉)	10hours rate	(0.23A to 10.5V)	2.3Ah
	5hours rate	(0.46A to 10.2V)	1.96Ah
	1C	(2.3A to 9.6V)	1.04Ah
	3C	(6.9A to 9.6V)	0.83Ah
Cold Cranking Amperes(-18℃ SAE Standard)			30A
Cold Cranking Amperes(-18℃ EN Standard)			45A
Internal Resistance (at 1KHz)			Appox.7.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)	
	Discharge	-15℃ (5℉) to 50℃ (122℉)	
	Storage	-15℃ (5℉) to 40℃ (104℉)	
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles		
	80% depth of discharge 225 cycles		
	50% depth of discharge 500 cycles		
Charge Retention (shelf life) at 20℃ (68℉)	1 month	92%	
	3 month	90%	
	6 month	80%	
Standby Use	3~5 years		
Case Material	PP		
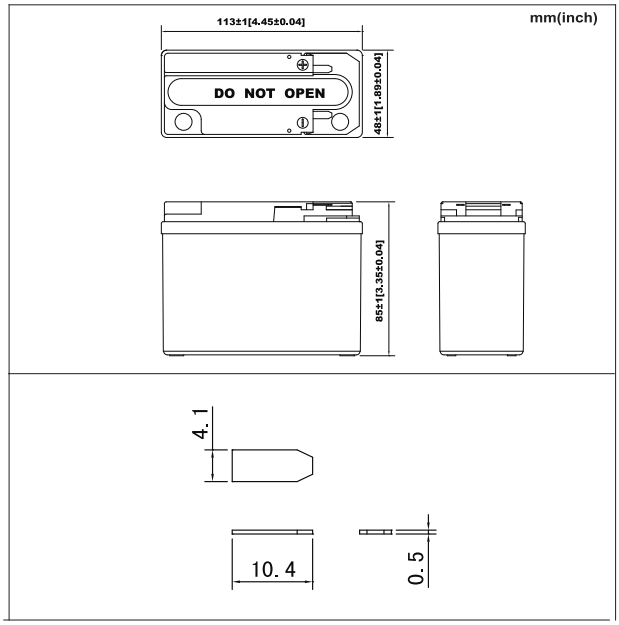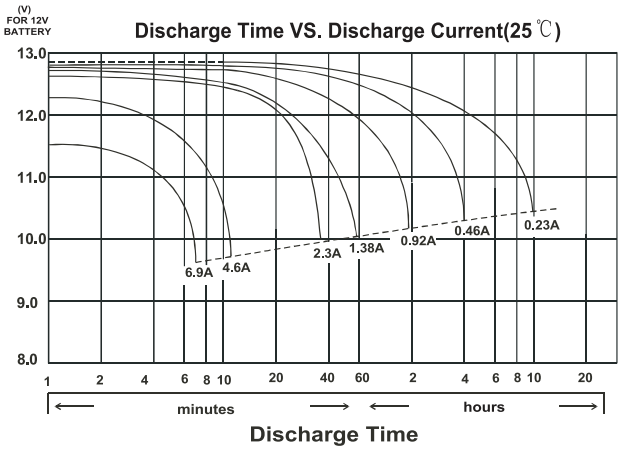
Dimensions