accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

CTX7L-BS

ETN: 506 0 14 005
DIN: 50614

Specifications

Model NO .		**CTX7L-BS** DIN:50614 ETN:506014005
Same Dimensions As YUASA Model		YTX7L-BS
Nominal Voltage		12V
Rated Capacity (10 hours rate)		6 AH
Dimension	Length	114 mm (4.49 inches)
	Width	70 mm (2.76 inches)
	Height	130 mm (5.12 inches)
	Total Height	130 mm (5.12 inches)
Approx. Weight W/O . ACID		2.02 kg (4.46 Lbs)
Approx. ACID Per Battery		0.36L
Charge Current (A)		0.6 A

Characteristics

Capacity 25℃(77℉)	10hours rate	(0.6 A to 10.5V)	6.0 Ah
	5hours rate	(1.2 A to 10.2V)	5.1 Ah
	1C	(6.0 A to 9.6V)	2.7 Ah
	3C	(18.0 A to 9.6V)	2.16Ah
Cold Cranking Amperes(-18℃ SAE Standard)			60 A
Cold Cranking Amperes(-18℃ EN Standard)			90 A
Internal Resistance (at 1KHz)			Appox.9.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)	
	Discharge	-15℃ (5℉) to 50℃ (122℉)	
	Storage	-15℃ (5℉) to 40℃ (104℉)	
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles		
	80% depth of discharge 225 cycles		
	50% depth of discharge 500 cycles		
Charge Retention (shelf life) at 20℃ (68℉)	1 month	92%	
	3 month	90%	
	6 month	80%	
Standby Use	3~5 years		
Case Material	PP		
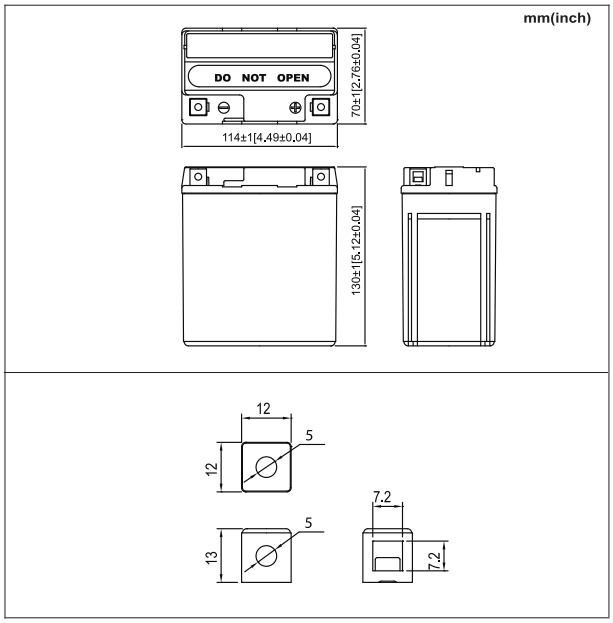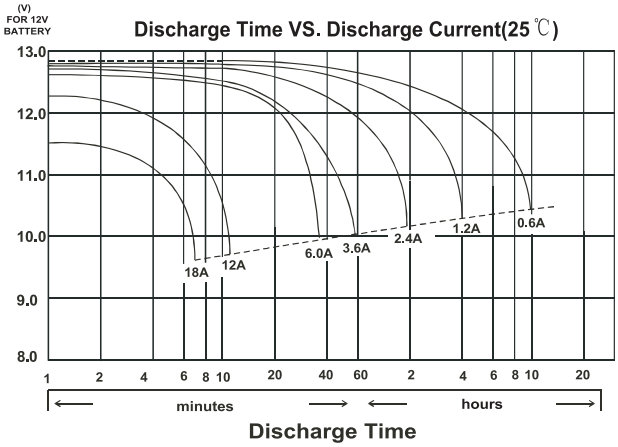
Dimensions