accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

CTX7A-BS

ETN: 506 0 15 005
DIN: 50615

Specifications

Model NO .		YTX7A-BS
Same Dimensions As YUASA Model		YTX7A-BS
Nominal Voltage		12V
Rated Capacity (10 hours rate)		6 AH
Dimension	Length	151 mm (5.94 inches)
	Width	87 mm (3.43 inches)
	Height	93 mm (3.66 inches)
	Total Height	93 mm (3.66 inches)
Approx. Weight W/O . ACID		1.92kg (4.23Lbs)
Approx. ACID Per Battery		0.372 L
Charge Current (A)		0.6A

Characteristics

Capacity 25℃(77℉)	10hours rate (0.6 A to 10.5V)	6.0 Ah
	5hours rate (1.2 A to 10.2V)	5.1 Ah
	1C (6.0 A to 9.6V)	2.7 Ah
	3C (18.0 A to 9.6V)	2.16 Ah
Cold Cranking Amperes(-18℃ SAE Standard)		85 A
Cold Cranking Amperes(-18℃ EN Standard)		125 A
Internal Resistance (at 1KHz)		Appox.9.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)
	Discharge	-15℃ (5℉) to 50℃ (122℉)
	Storage	-15℃ (5℉) to 40℃ (104℉)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20℃ (68℉)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	PP	
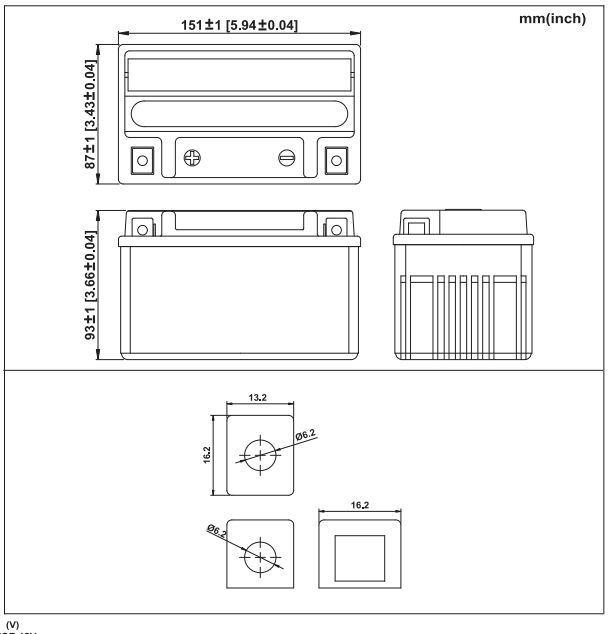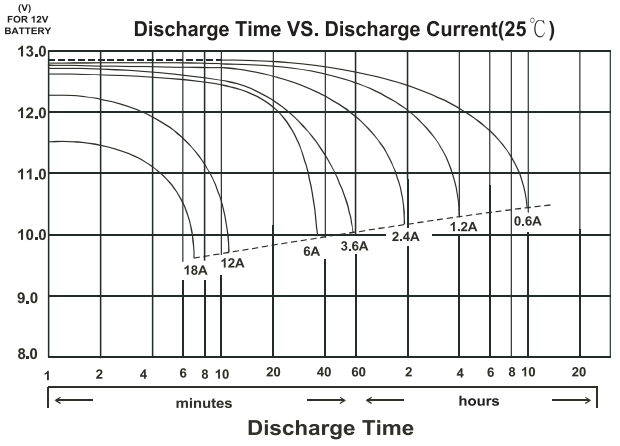
Dimensions