accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

CTX12A-BS

ETN: 510 0 13 009
DIN: 51013

Specifications

Model NO .		CTX12A-BS DIN:51013 ETN:510013009
Same Dimensions As YUASA Model		YTX12A-BS
Nominal Voltage		12V
Rated Capacity (10 hours rate)		10AH
Dimension	Length	150 mm (5.91 inches)
	Width	87 mm (3.43 inches)
	Height	106 mm (4.17 inches)
	Total Height	106 mm (4.17 inches)
Approx. Weight W/O . ACID		2.67 kg (5.89 Lbs)
Approx. ACID Per Battery		0.49 L
Charge Current (A)		1.0 A

Characteristics

Capacity 25℃(77℉)	10hours rate (1.0 A to 10.5V)	10 Ah
	5hours rate (2.0 A to 10.2V)	8.5 Ah
	1C (10 A to 9.6V)	4.5Ah
	3C (30 A to 9.6V)	3.6 Ah
Cold Cranking Amperes(-18℃ SAE Standard)		120 A
Cold Cranking Amperes(-18℃ EN Standard)		180 A
Internal Resistance (at 1KHz)		Appox.7.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)
	Discharge	-15℃ (5℉) to 50℃ (122℉)
	Storage	-15℃ (5℉) to 40℃ (104℉)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20℃ (68℉)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	PP	
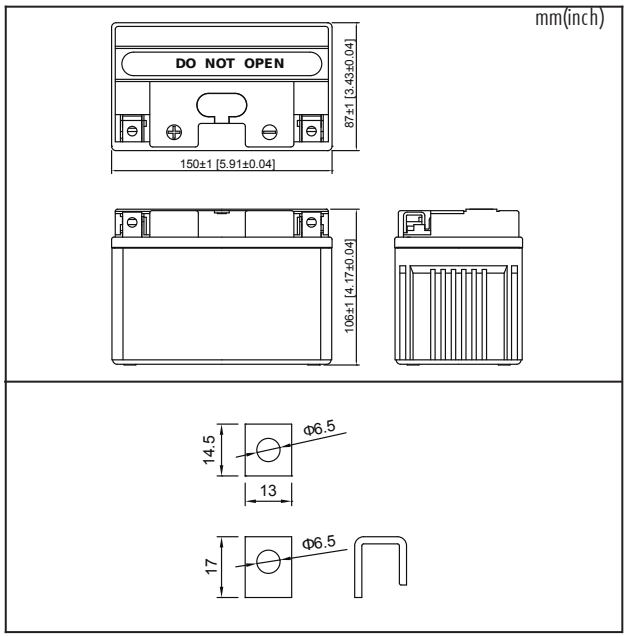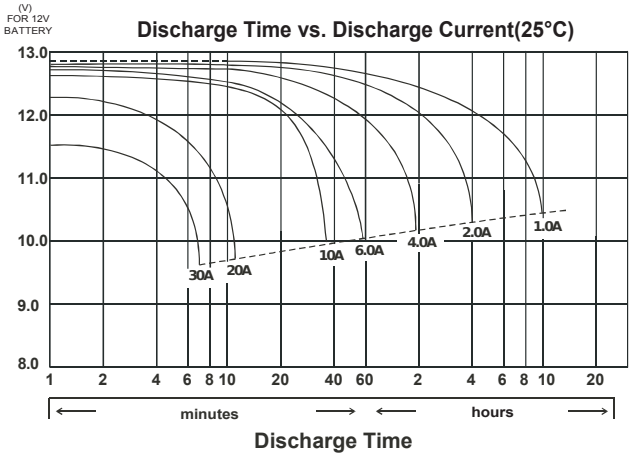
Dimensions