accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

6N6-3B-1

ETN: 006 0 12 003
DIN: 00612

Specifications

Model NO .		6N6-3B-1 DIN:00612 ETN:006012003
Same Dimensions As YUASA Model		6N6-3B-1
Nominal Voltage		6 V
Rated Capacity (10 hours rate)		6 AH
Dimension	Length	99 mm (3.90 inches)
	Width	57 mm (2.24 inches)
	Height	110 mm (4.33 inches)
	Total Height	110 mm (4.33 inches)
Approx. Weight W/O . ACID		0.83 kg (1.83 Lbs)
Approx. ACID Per Battery		0.27 L
Charge Current (A)		0.6 A

Characteristics

Capacity 25℃(77℉)	10hours rate	(0.6 A to 5.25V)	6 Ah
	5hours rate	(1.2 A to 5.1V)	5.1 Ah
	1C	(6.0 A to 4.8V)	2.7 Ah
	3C	(18.0 A to 4.8V)	2.16 Ah
Cold Cranking Amperes(-18℃ SAE Standard)			48 A
Cold Cranking Amperes(-18℃ EN Standard)			72 A
Internal Resistance (at 1KHz)			Appox.7.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)	
	Discharge	-15℃ (5℉) to 50℃ (122℉)	
	Storage	-15℃ (5℉) to 40℃ (104℉)	
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles		
	80% depth of discharge 225 cycles		
	50% depth of discharge 500 cycles		
Charge Retention (shelf life) at 20℃ (68℉)	1 month	85%	
	3 month	80%	
	6 month	75%	
Standby Use	3~5 years		
Case Material	PP		
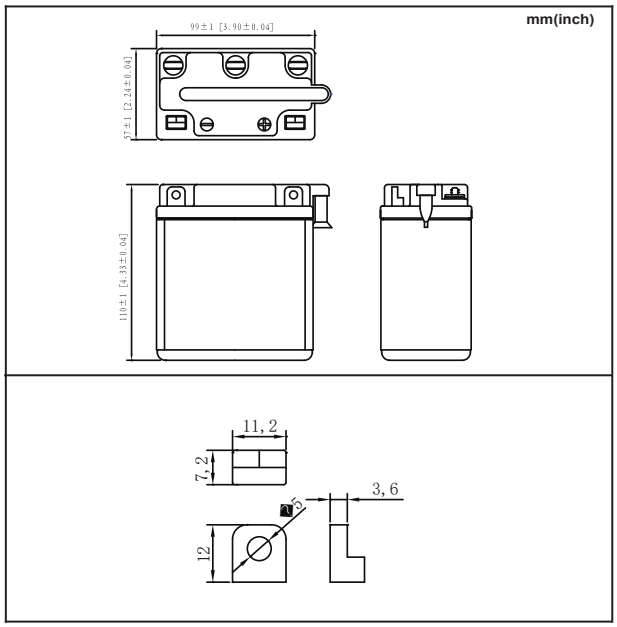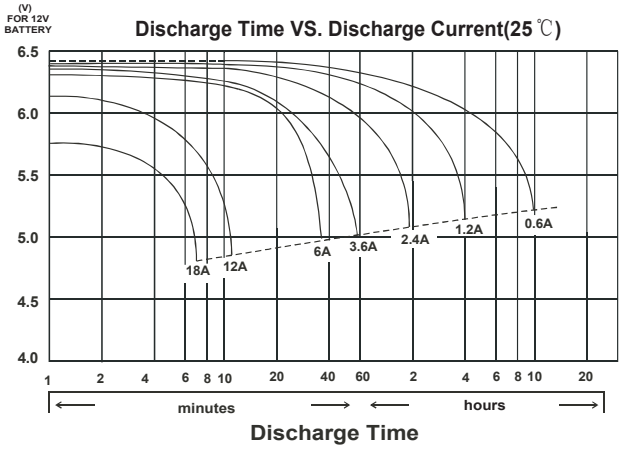
Dimensions