accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

6N11A-1B/3A

ETN: 012 0 14 008
DIN: 01214

Specifications

Model NO .		6N11A-1B DIN:01214 ETN:012014008
Same Dimensions As YUASA Model		6N11A-1B
Nominal Voltage		6 V
Rated Capacity (10 hours rate)		11AH
Dimension	Length	122 mm (4.80 inches)
	Width	62 mm (2.44 inches)
	Height	132 mm (5.20 inches)
	Total Height	132 mm (5.20 inches)
Approx. Weight W/O . ACID		1.28kg (2.82 Lbs)
Approx. ACID Per Battery		0.42 L
Charge Current (A)		1.1 A

Characteristics

Capacity 25℃(77℉)	10hours rate (1.1 A to 5.25V)	11 Ah
	5hours rate (2.2A to 5.1V)	9.3 Ah
	1C (11 A to 4.8V)	5.0 Ah
	3C (33 A to 4.8V)	3.9Ah
Cold Cranking Amperes(-18℃ SAE Standard)		88 A
Cold Cranking Amperes(-18℃ EN Standard)		32 A
Internal Resistance (at 1KHz)		Appox.7.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)
	Discharge	-15℃ (5℉) to 50℃ (122℉)
	Storage	-15℃ (5℉) to 40℃ (104℉)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20℃ (68℉)	1 month	85%
	3 month	80%
	6 month	75%
Standby Use	3~5 years	
Case Material	PP	
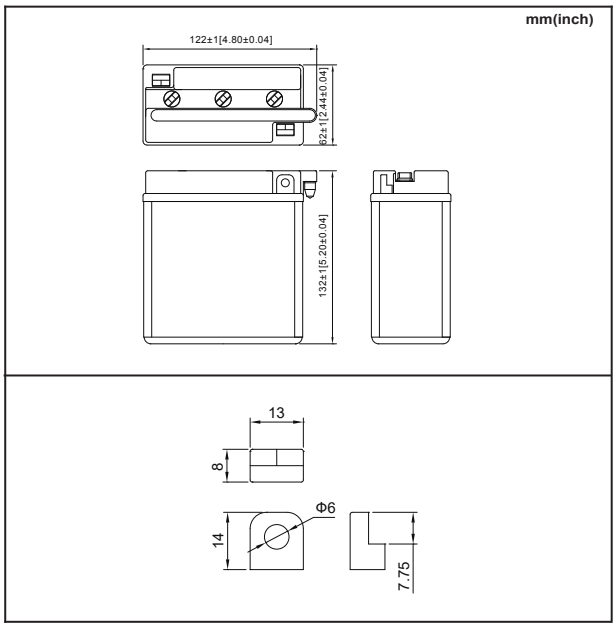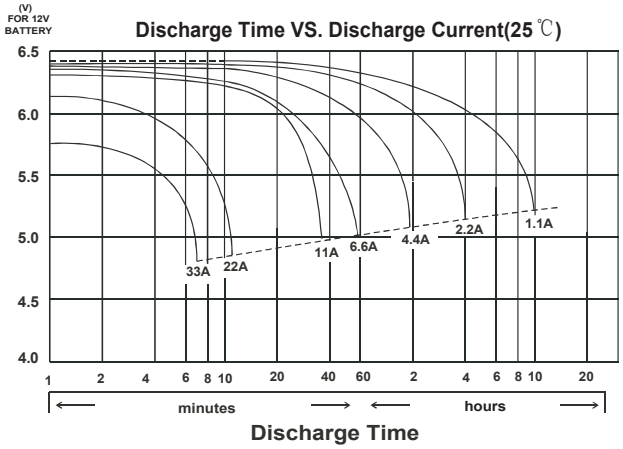
Dimensions