accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

CB5L-B

ETN: 505 0 12 003
DIN: 50512

Specifications

Model NO.		CB5L-B DIN: 50512 ETN: 505012003
Same Dimensions As YUASA Model		YB5L-B
Nominal Voltage		12V
Rated Capacity (10 hours rate)		5 AH
Dimension	Length	120 mm (4.72 inches)
	Width	61 mm (2.40 inches)
	Height	130 mm (5.12 inches)
	Total Height	130 mm (5.12 inches)
Approx. Weight W/O . ACID		1.41 kg (3.10Lbs)
Approx. ACID Per Battery		0.40 L
Charge Current (A)		0.5 A

Characteristics

Capacity 25℃(77℉)	10hours rate	(0.5 A to 10.5V)	5.0 Ah
	5hours rate	(1.0A to 10.2V)	4.2 Ah
	1C	(5 A to 9.6V)	2.2Ah
	3C	(15 A to 9.6V)	1.8 Ah
Cold Cranking Amperes(-18℃ SAE Standard)			40 A
Cold Cranking Amperes(-18℃ EN Standard)			60 A
Internal Resistance (at 1KHz)			Appox.7.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)	
	Discharge	-15℃ (5℉) to 50℃ (122℉)	
	Storage	-15℃ (5℉) to 40℃ (104℉)	
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles		
	80% depth of discharge 225 cycles		
	50% depth of discharge 500 cycles		
Charge Retention (shelf life) at 20℃ (68℉)	1 month	85%	
	3 month	80%	
	6 month	75%	
Standby Use	3~5 years		
Case Material	PP		
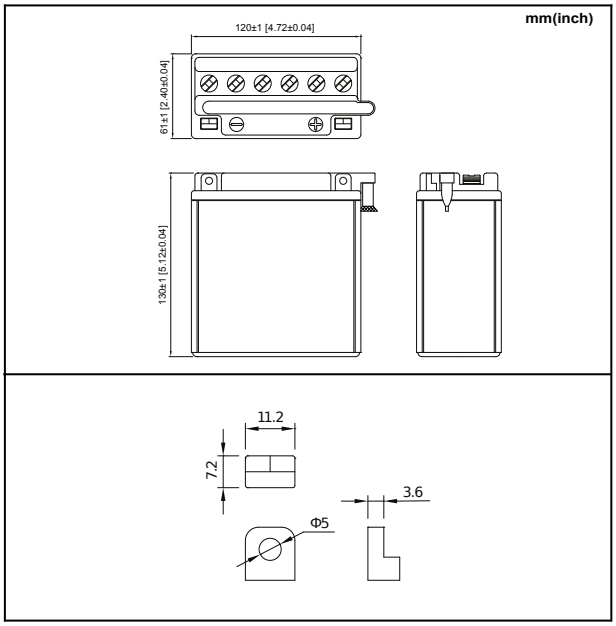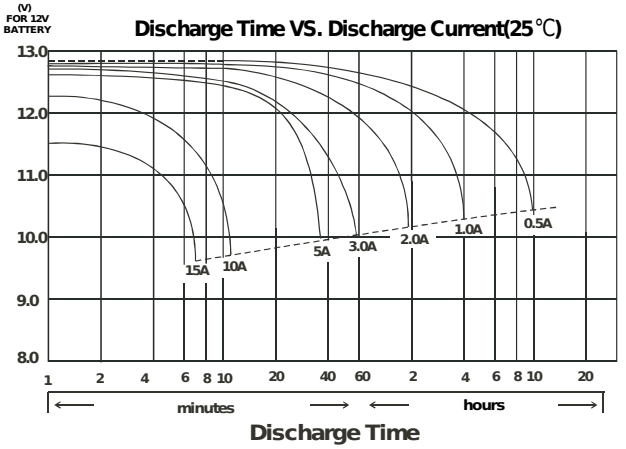
Dimensions