accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

CB7C-A

ETN: 507 1 01 008
DIN: 50708

Specifications

Model NO .		CB7C-A DIN:50708 ETN: 507101008
Same Dimensions As YUASA Model		YB7C-A
Nominal Voltage		12V
Rated Capacity (10 hours rate)		8AH
Dimension	Length	130mm (5.11inches)
	Width	90mm (3.54inches)
	Height	116mm (4.57nches)
	Total Height	116mm (4.57inches)
Approx. Weight W/O . ACID		2.35kg (5.18Lbs)
Approx. ACID Per Battery		0.50 L
Charge Current (A)		0.8A

Characteristics

Capacity 25℃(77℉)	10hours rate (0.8A to 10.5V)	8.0Ah
	5hours rate (1.6A to 10.2V)	6.8Ah
	1C (8A to 9.6V)	3.6Ah
	3C (24A to 9.6V)	2.8Ah
Cold Cranking Amperes(-18℃ SAE Standard)		80A
Cold Cranking Amperes(-18℃ EN Standard)		120A
Internal Resistance (at 1KHz)		Appox.7.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)
	Discharge	-15℃ (5℉) to 50℃ (122℉)
	Storage	-15℃ (5℉) to 40℃ (104℉)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20℃ (68℉)	1 month	85%
	3 month	80%
	6 month	75%
Standby Use	3~5 years	
Case Material	PP	
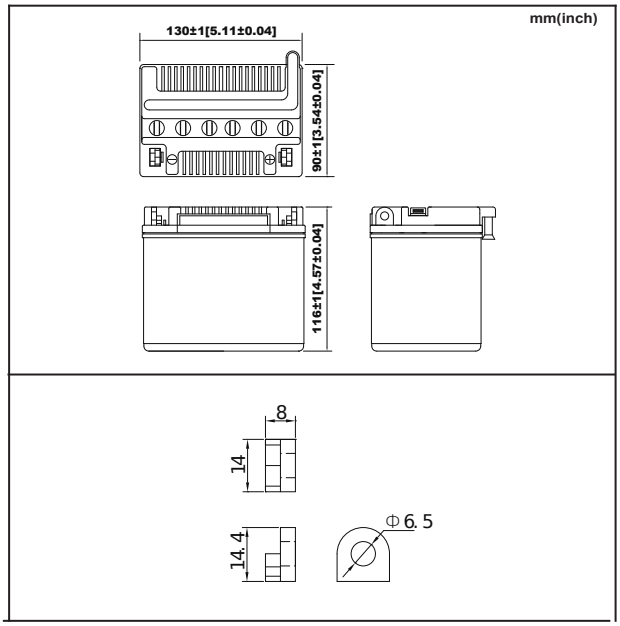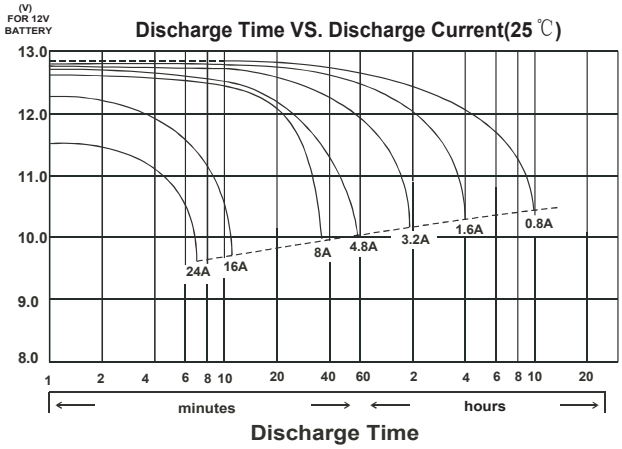
Dimensions