accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

CB7L-B

ETN: 507 0 12 004
DIN: 50712

Specifications

Model NO .		**CB7L-B** DIN:50712 ETN:507012004
Same Dimensions As YUASA Model		YB7L-B
Nominal Voltage		12V
Rated Capacity (10 hours rate)		8AH
Dimension	Length	137 mm (5.40 inches)
	Width	75mm (2.95 inches)
	Height	134mm (5.27nches)
	Total Height	134mm (5.27 inches)
Approx. Weight W/O . ACID		2.04kg (4.50Lbs)
Approx. ACID Per Battery		0.63 L
Charge Current (A)		0.8A

Characteristics

Capacity 25℃(77℉)	10hours rate	(0.8A to 10.5V)	8Ah
	5hours rate	(1.6A to 10.2V)	6.8Ah
	1C	(8.0A to 9.6V)	3.6Ah
	3C	(24A to 9.6V)	2.9Ah
Cold Cranking Amperes(-18℃ SAE Standard)			90A
Cold Cranking Amperes(-18℃ EN Standard)			135A
Internal Resistance (at 1KHz)			Appox.7.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)	
	Discharge	-15℃ (5℉) to 50℃ (122℉)	
	Storage	-15℃ (5℉) to 40℃ (104℉)	
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles		
	80% depth of discharge 225 cycles		
	50% depth of discharge 500 cycles		
Charge Retention (shelf life) at 20℃ (68℉)	1 month	85%	
	3 month	80%	
	6 month	75%	
Standby Use	3~5 years		
Case Material	PP		
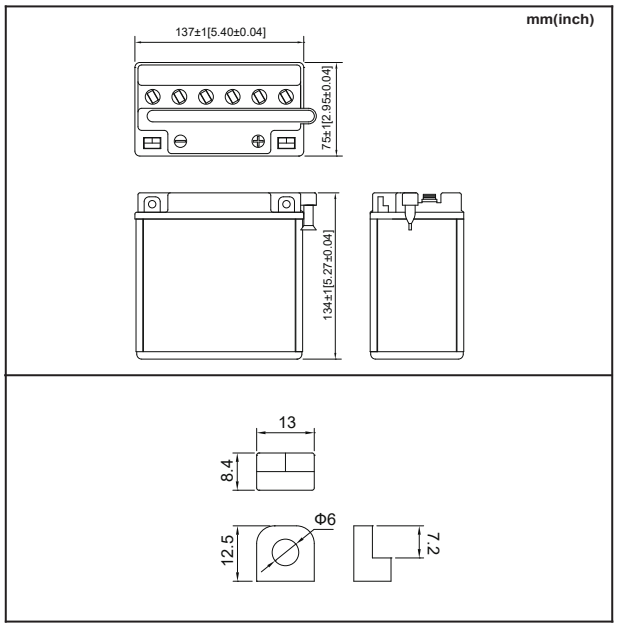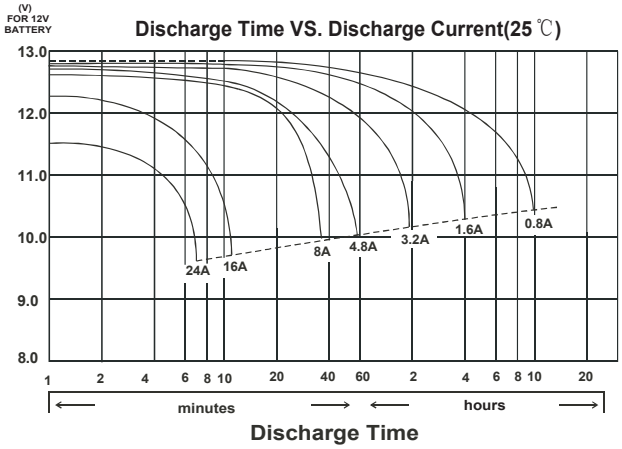
Dimensions