accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

CB7-A

ETN: 508 0 13 005
DIN: 50813

Specifications

Model NO .		CB7-A DIN:50813 ETN:508013005
Same Dimensions As YUASA Model		YB7-A
Nominal Voltage		12V
Rated Capacity (10 hours rate)		8 AH
Dimension	Length	137 mm (5.39 inches)
	Width	75 mm (2.95 inches)
	Height	134 mm (5.28 inches)
	Total Height	134 mm (5.28 inches)
Approx. Weight W/O . ACID		2.04 kg (4.5 Lbs)
Approx. ACID Per Battery		0.64 L
Charge Current (A)		0.8 A

Characteristics

Capacity 25℃(77℉)	10hours rate	(0.8 A to 10.5V)	8.0 Ah
	5hours rate	(1.6 A to 10.2V)	6.8 Ah
	1C	(8.0 A to 9.6V)	3.6 Ah
	3C	(24.0 A to 9.6V)	2.88 Ah
Cold Cranking Amperes(-18℃ SAE Standard)			90 A
Cold Cranking Amperes(-18℃ EN Standard)			135 A
Internal Resistance (at 1KHz)			Appox.7.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)	
	Discharge	-15℃ (5℉) to 50℃ (122℉)	
	Storage	-15℃ (5℉) to 40℃ (104℉)	
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles		
	80% depth of discharge 225 cycles		
	50% depth of discharge 500 cycles		
Charge Retention (shelf life) at 20℃ (68℉)	1 month	85%	
	3 month	80%	
	6 month	75%	
Standby Use	3~5 years		
Case Material	PP		
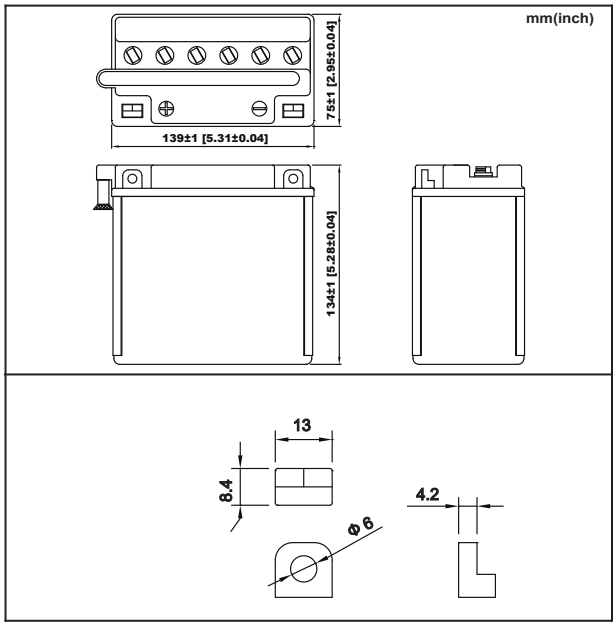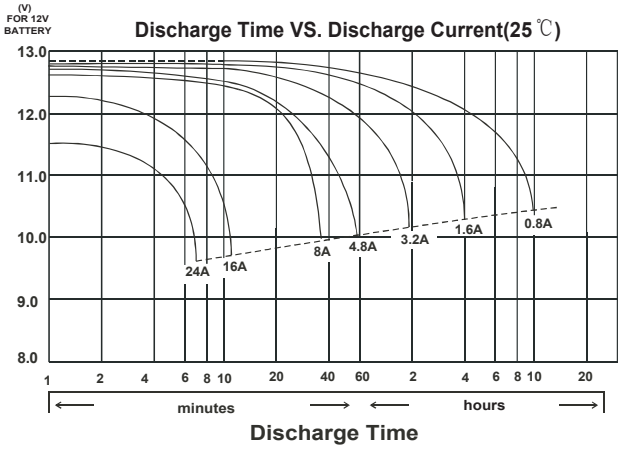
Dimensions