accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

CB9L-B

ETN: 509 0 15 008
DIN: 50915

Specifications

Model NO.		CB9L-B
Same Dimensions As YUASA Model		YB9L-B
Nominal Voltage		12V
Rated Capacity (10 hours rate)		9AH
Dimension	Length	135 mm (5.31 inches)
	Width	75mm (2.95 inches)
	Height	139mm (5.47nches)
	Total Height	139mm (5.47 inches)
Approx. Weight W/O . ACID		2.12kg (4.67Lbs)
Approx. ACID Per Battery		0.66 L
Charge Current (A)		0.9A

Characteristics

Capacity 25℃(77℉)	10hours rate (0.9A to 10.5V)	9Ah
	5hours rate (1.8A to 10.2V)	7.6Ah
	1C (9.0A to 9.6V)	4.0Ah
	3C (2.7A to 9.6V)	3.2Ah
Cold Cranking Amperes(-18℃ SAE Standard)		90A
Cold Cranking Amperes(-18℃ EN Standard)		135A
Internal Resistance (at 1KHz)		Appox.10.5mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)
	Discharge	-15℃ (5℉) to 50℃ (122℉)
	Storage	-15℃ (5℉) to 40℃ (104℉)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20℃ (68℉)	1 month	85%
	3 month	80%
	6 month	75%
Standby Use	3~5 years	
Case Material	PP	
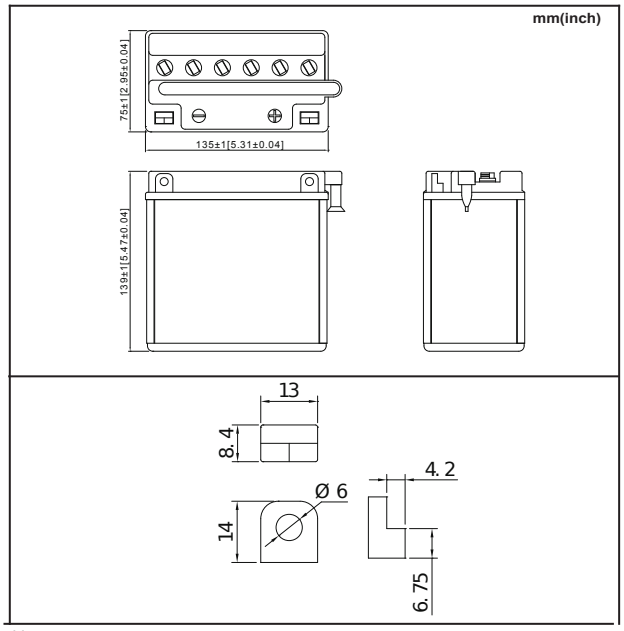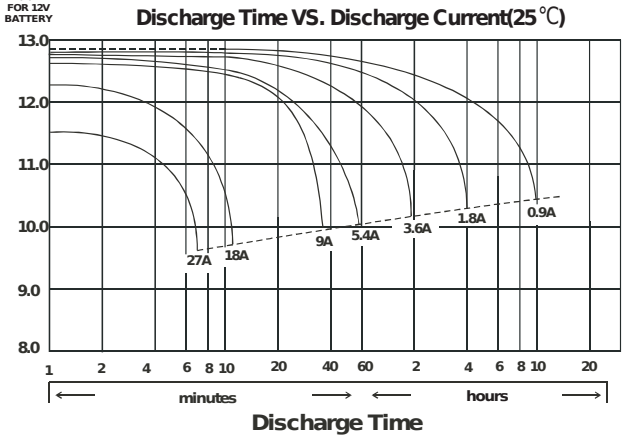
Dimensions