accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

CB9L-A2

ETN: 509 0 16 008
DIN: 50916

Specifications

Model NO .		CB9L-A2 DIN:50916 ETN:509016008
Same Dimensions As YUASA Model		YB9L-A2
Nominal Voltage		12V
Rated Capacity (10 hours rate)		9 AH
Dimension	Length	136 mm (5.35 inches)
	Width	76 mm (2.99 inches)
	Height	138 mm (5.43 inches)
	Total Height	138 mm (5.43 inches)
Approx. Weight W/O . ACID		2.09 kg (4.61 Lbs)
Approx. ACID Per Battery		0.66 L
Charge Current (A)		0.9 A

Characteristics

Capacity 25℃(77℉)	10hours rate (0.9 A to 10.5V)	9.0 Ah
	5hours rate (1.8 A to 10.2V)	7.65 Ah
	1C (9.0 A to 9.6V)	4.05 Ah
	3C (27.0 A to 9.6V)	3.24 Ah
Cold Cranking Amperes(-18℃ SAE Standard)		90 A
Cold Cranking Amperes(-18℃ EN Standard)		135 A
Internal Resistance (at 1KHz)		Appox.7.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)
	Discharge	-15℃ (5℉) to 50℃ (122℉)
	Storage	-15℃ (5℉) to 40℃ (104℉)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20℃ (68℉)	1 month	85%
	3 month	80%
	6 month	75%
Standby Use	3~5 years	
Case Material	PP	
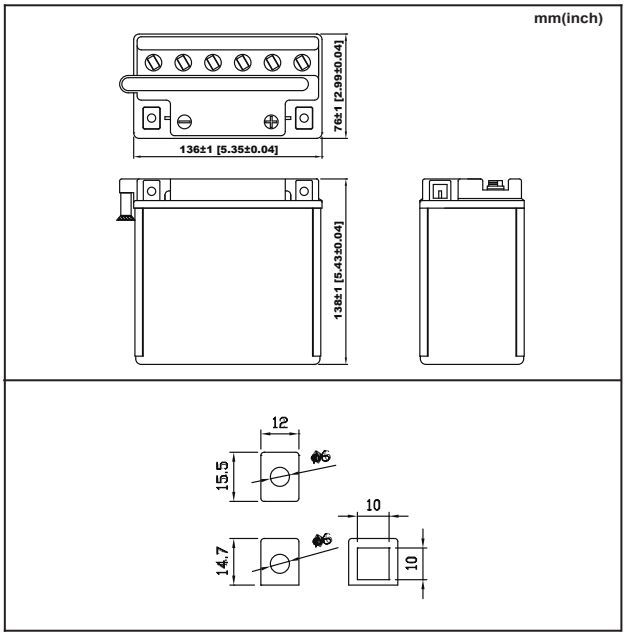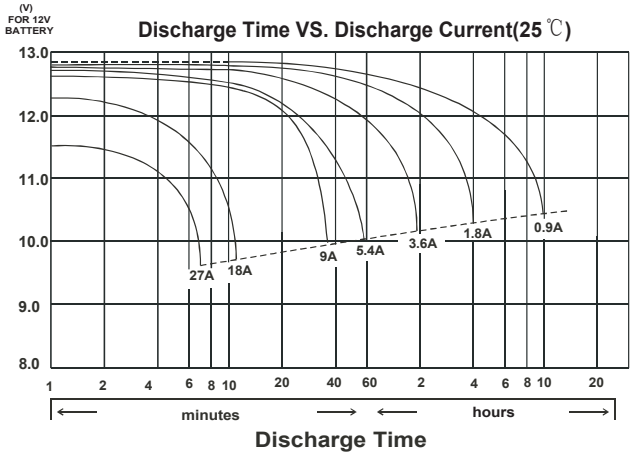
Dimensions