accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

CB10L-B

ETN: 511 0 13 009
DIN: 51113

Specifications

Model NO.		CB10L-B
Same Dimensions As YUASA Model		YB10L-B
Nominal Voltage		12V
Rated Capacity (10 hours rate)		11AH
Dimension	Length	134 mm (5.27 inches)
	Width	90mm (3.54 inches)
	Height	145mm (5.71inches)
	Total Height	145mm (5.71 inches)
Approx. Weight W/O . ACID		2.96kg (6.52Lbs)
Approx. ACID Per Battery		0.78 L
Charge Current (A)		1.1A

Characteristics

Capacity 25℃(77℉)	10hours rate (1.1A to 10.5V)	11Ah
	5hours rate (2.2A to 10.2V)	9.35Ah
	1C (11A to 9.6V)	4.95Ah
	3C (33A to 9.6V)	3.96Ah
Cold Cranking Amperes(-18℃ SAE Standard)		140A
Cold Cranking Amperes(-18℃ EN Standard)		210A
Internal Resistance (at 1KHz)		Appox.7.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)
	Discharge	-15℃ (5℉) to 50℃ (122℉)
	Storage	-15℃ (5℉) to 40℃ (104℉)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20℃ (68℉)	1 month	85%
	3 month	80%
	6 month	75%
Standby Use	3~5 years	
Case Material	PP	
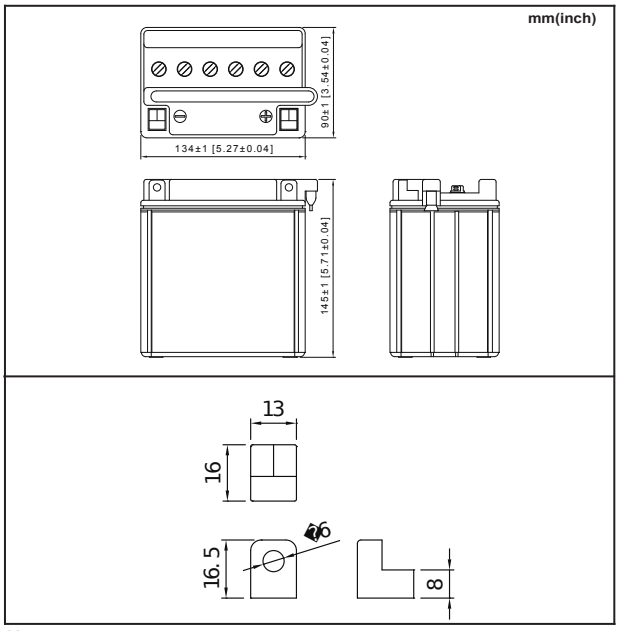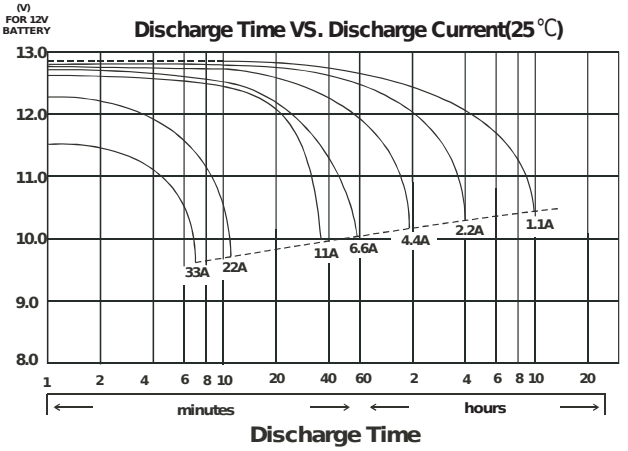
Dimensions