accu-profi Solution GmbH & Co. KG
An der Loher Mühle 25
32545 Bad Oeynhausen
beratung@accu-profi.de
Tel. +49 5731 866 555 0
Fax +49 5731 866 555 9
www.accu-profi.de

Panther Batterien

Batteriedatenblatt

CB14L-A2

ETN: 514 0 11 014
DIN: 51411

Specifications

Model NO .		CB14L-A2 DIN:51411 ETN:514011014
Same Dimensions As YUASA Model		YB14L-A2
Nominal Voltage		12V
Rated Capacity (10 hours rate)		14 AH
Dimension	Length	135 mm (5.31 inches)
	Width	89 mm (3.50 inches)
	Height	164 mm (6.46 inches)
	Total Height	164 mm (6.46 inches)
Approx. Weight W/O . ACID		3.48 kg (7.67 Lbs)
Approx. ACID Per Battery		0.87 L
Charge Current (A)		1.4 A

Characteristics

Capacity 25℃(77℉)	10hours rate (1.4 A to 10.5V)	14 Ah
	5hours rate (2.8 A to 10.2V)	11.9 Ah
	1C (14 A to 9.6V)	6.3 Ah
	3C (42 A to 9.6V)	5.0 Ah
Cold Cranking Amperes(-18℃ SAE Standard)		160 A
Cold Cranking Amperes(-18℃ EN Standard)		240 A
Internal Resistance (at 1KHz)		Appox.7.0mΩ
Operating Temperature Range	Charge	0℃ (32℉) to 40℃ (104℉)
	Discharge	-15℃ (5℉) to 50℃ (122℉)
	Storage	-15℃ (5℉) to 40℃ (104℉)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20℃ (68℉)	1 month	85%
	3 month	80%
	6 month	75%
Standby Use	3~5 years	
Case Material	PP	
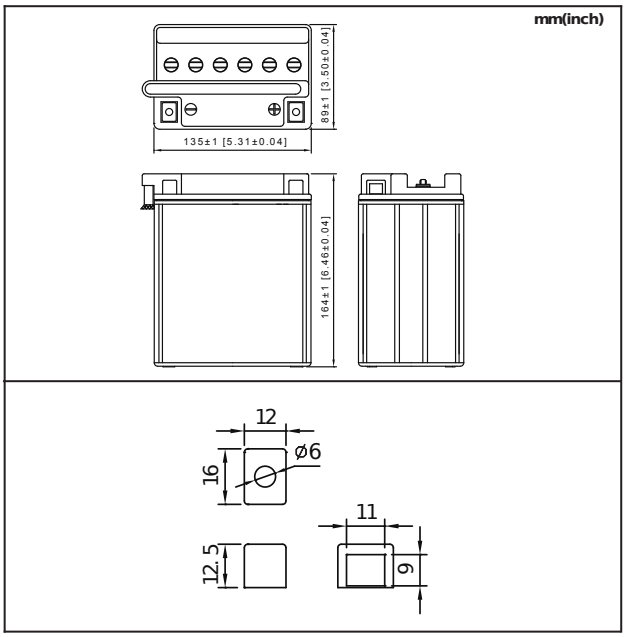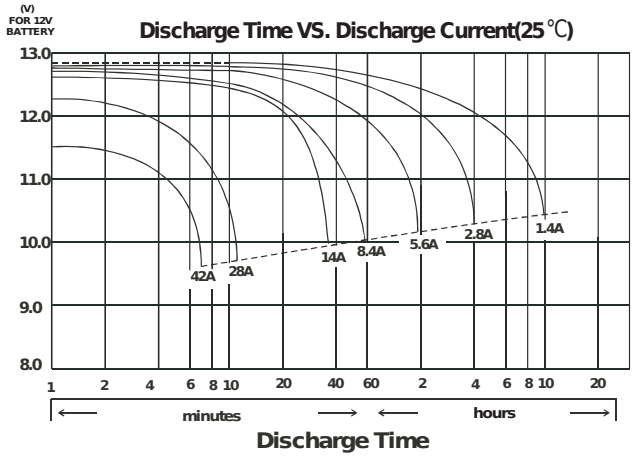
Dimensions