

Panther Batterien

Batteriedatenblatt



CB5L-B

ETN: GEL 505 0 12 006


DIN: 50512

Specifications

Model NO .	GT9B-4	
Same Dimensions As YUASA Model	YB5L-B	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	5.0 AH	
Dimension	Length	120 mm (4.72 inches)
	Width	60 mm (2.36 inches)
	Height	131 mm (5.16 inches)
	Total Height	131 mm (5.16 inches)
Approx. Wight	Approx. 1.93kg (4.25Lbs)	
Charge Current (A)	0.5 A	



Dimensions

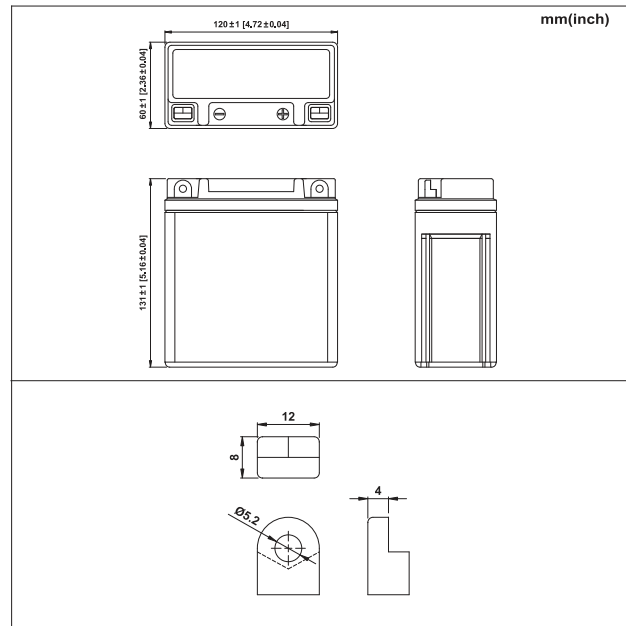

Characteristics

Capacity 25°C (77°F)	10hours rate (0.5 A to 10.5V)	5.0 Ah
	5hours rate (1.0 A to 10.2V)	4.25 Ah
	1C (5.0 A to 9.6V)	2.25 Ah
	3C (15.0 A to 9.6V)	1.8 Ah
Cold Cranking Amperes(-18°C SAE Standard)		45 A
Cold Cranking Amperes(-18°C EN Standard)		67 A
Internal Resistance (at 1KHz)		Appox.10mΩ
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	ABS	

