




# F06-06-315 (J305)

## Flooded Deep Cycle Battery



Left - positive      Right - negative

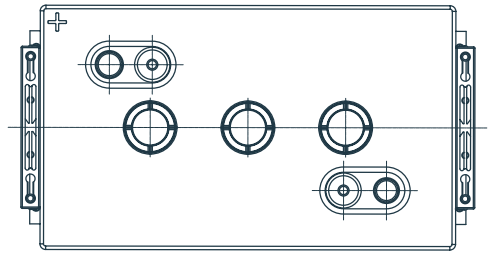

### Electrical Specifications

<b>C5 Capacity</b>	270Ah
<b>C20 Capacity</b>	315Ah
<b>Voltage</b>	6V
<b>80% DOD Voltage Cutoff</b>	5.6V
<b>Self Discharge</b>	Less than 3% per month (20°C/68°F)
<b>Charge Temperature</b>	Min: -10°C (14°F) / Max: 50°C (122°F)
<b>Discharge Temperature**</b>	Min: -40°C (-40°F) / Max: 50°C (122°F)
<b>Storage</b>	Min: -20°C (-4°F) / Max: 60°C (140°F)

### Features

- Flooded bloc batteries

---

- Good high current performance for extreme operating conditions

---

- 1000 cycles (IEC 60254)

---

- Recyclable

---

- Long cycle life

---

- Low self discharge rate



---

### Mechanical Specifications

<b>Industry Reference</b>	J305	
<b>Length (A)</b>	12.1 in	308 mm
<b>Width (B)</b>	6.8 in	174 mm
<b>Height (C)</b>	13.3 in	339 mm
<b>Height (D)</b>	14.4 in	365 mm
<b>Weight</b>	89.3 lbs	40.5 kgs
<b>Terminal (Opt'l)</b>	Dual	
<b>Cell(s)</b>	3	
<b>Electrolyte</b>	Flooded	
<b>Terminal Torque Nm</b>	10	

NOTE: There is a tolerance of +/-2%.

### Dual

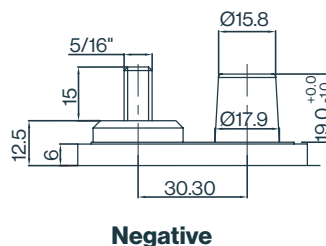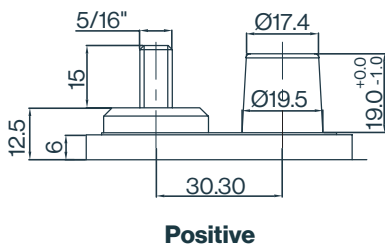

### All applications including:

- Cleaning Machines

---

- Aerial Platforms & Lifters

---

- Pallet Trucks

---

- Golf Carts